

UDC



中华人民共和国国家标准

P

GB 13554

GB 13554-92

High efficiency particulate air filter

()

2008

14

14

14

15

19

21

((

1 1

(% (« » ((« »


(% « » (« » (« »

» « » « » « » « » « » « » « »

%

~~0/0~~

GB/T

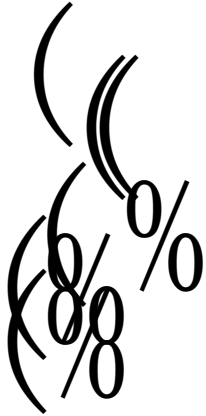

0/
0

most penetrating particle size

(

)

$$\sigma_g \quad + \quad \leq \sigma_g \leq$$
$$\sigma_g$$

3.2

CNC

DEHS

DOP

MPPS

Sebacic acid-bis(2-ethyl)-ester

Phthalic acid-bis(2-ethyl)-ester

di-ethyl-hexyl-sebacate

di-octyl-phthalate

OPC

PSL

00/
/00

00/
/00


0/
/0

a.

b.

)

c.

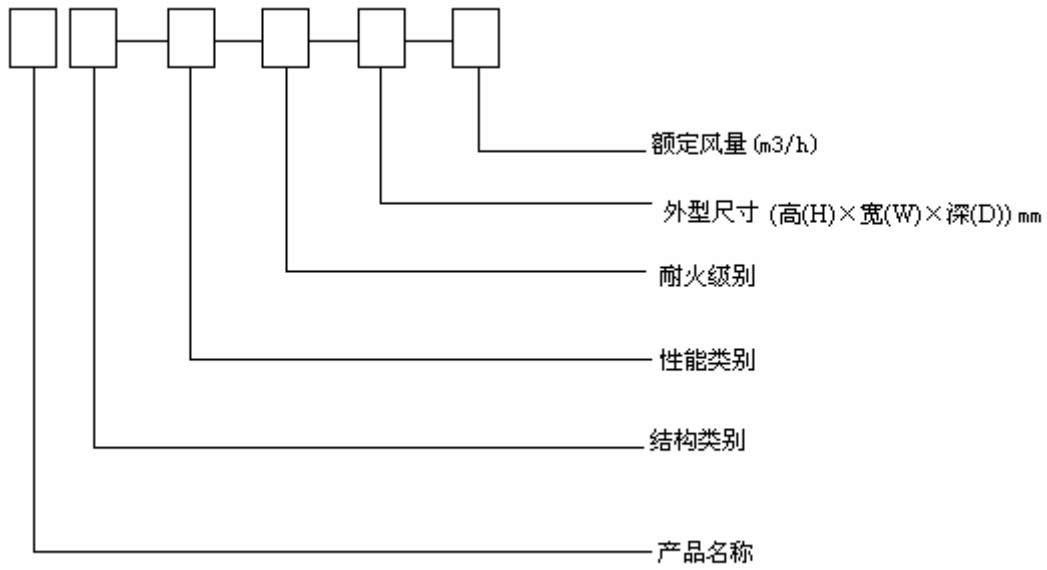

1

4

1			G C
2		4.1	Y
		4.1	W
3		4.2	A B C D E F
4		4.3	1 2 3


GY-A-3-484 484 220-1000 A 99.9%

3 484 484 220 1000m³/h

CW-D-2-610 1220 80-2400 D, 99.999%

2 610 1220 80 2400m³/h

C

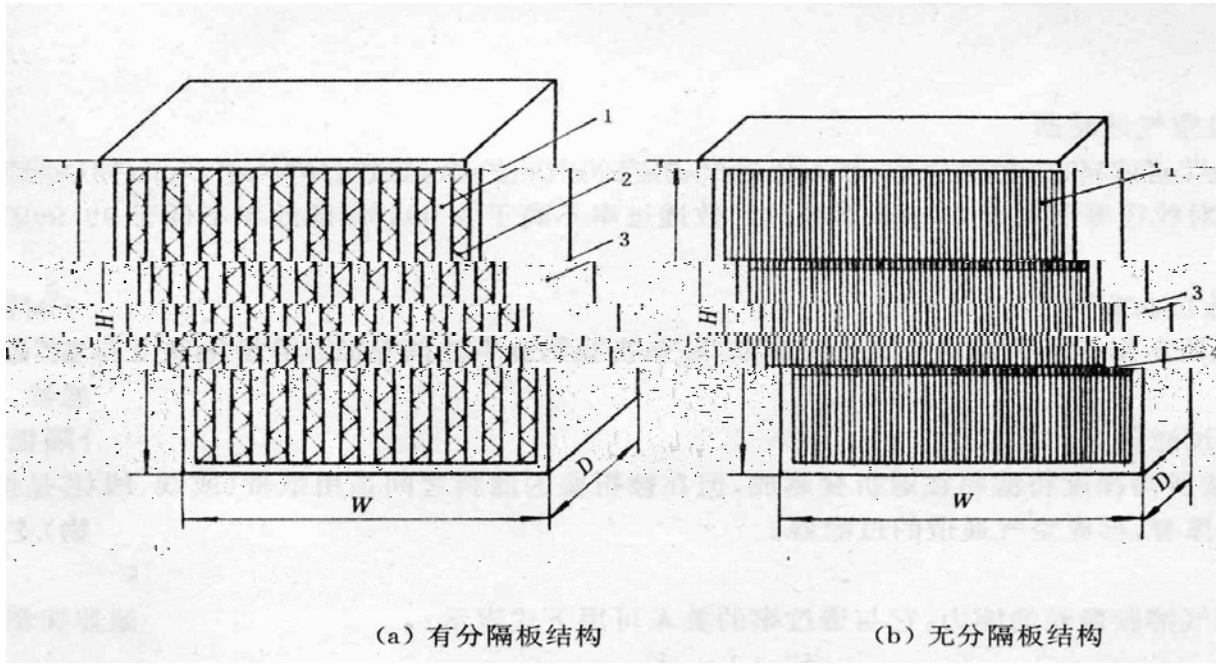

1— 2 3 4

2

% %

%

%
%
%

%
%

(%)

(
(

(

%

%

%


(

%

%

%

5

					
			0.5 m		
			3	$3 \cdot 10^4$	
				0.1 m	
			3	$3 \cdot 10^6$	

100%

20%

%

%
%
%
%
%
%
%
%
%

%

%

%

%
%

(

%

%
%

%
%

%
%

%

%
%

%

(

%
%

%
%

%

			0/0
			0/0
			0/0
			0/0
0/0			0/0
			0/0
			0/0
			0/0
			0/0
			0/0


(

%
(

)
)

(

ISO7

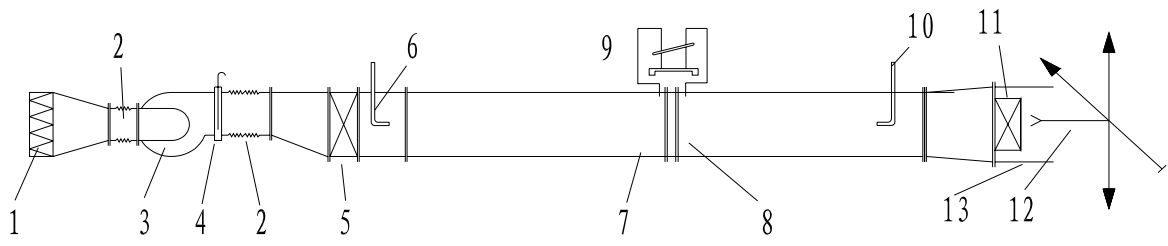

- | | | | | | | | |
|----|---|----|---|---|----|----|--|
| 1— | 2 | 3 | 4 | 5 | | | |
| 6 | | 7 | 8 | | 9 | 10 | |
| 11 | | 12 | | | 13 | | |


A1

(

%


%

%

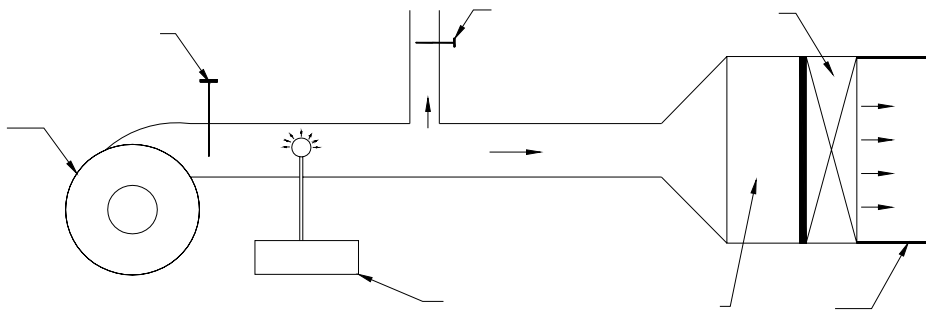

%

(

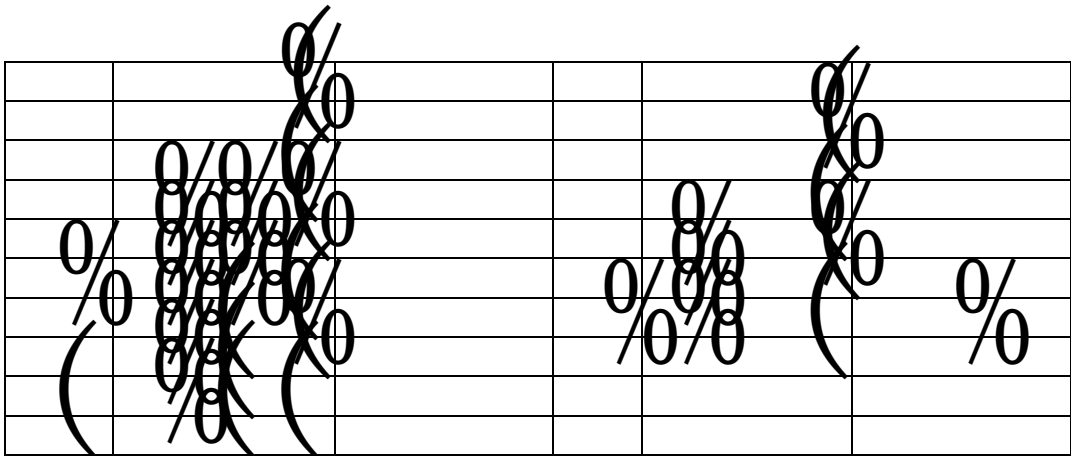

484 484 220

1000m³/h

350Pa

220Pa B

484 484 90

600m³/h